

PROGRAMMING WITH utPLSQL



Philipp Salvisberg
13th October 2022

2 WELCOME




PHILIPP SALVISBERG SENIOR PRINCIPAL CONSULTANT

- Database centric development
- Model Driven Software Development
- Author of free SQL Developer Extensions
PL/SQL Unwrapper, db* CODECOP, utPLSQL,
plscope-utils, oddgen and Bitemp Remodeler



INTRODUCTION

4 TESTING SCOPE IN DATABASE DEVELOPMENT

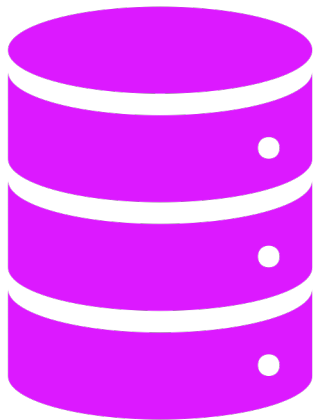

Every component of an application that is deployed in the database.

5 TABLE (CHECK CONSTRAINT, VIRTUAL COLUMN)

```
create table t (  
  id integer generated always as identity  
  not null constraint t_pk primary key,  
  phone_number varchar2(30 char) not null  
  constraint t_phone_number_ck check (  
    regexp_like(phone_number,  
      '^(\+?(\d{1,3}))?'  
      || '([-. ]*(\d{3})[-. ]*)?'  
      || '((\d{3})[-. ]*)'  
      || '(\d{2,4})'  
      || '([-.x ]*(\d+))?)$'  
    )  
  )  
);
```



insert into t
(phone_number)
values
('+41 79 558 35 22');

-- country
-- 1st group
-- 2nd group, 1st sub
-- 2nd group, 2nd sub
-- 2nd group, 3rd sub

Source: <https://regexr.com/38pvh>

6 VIEW

```
create or replace view deptsal as
  select d.deptno,
         d.dname,
         coalesce(sum(e.sal), 0) as sum_sal,
         coalesce(count(e.empno), 0) as num_emps,
         coalesce(round(avg(e.sal), 2), 0) as avg_sal
  from dept d
 left join emp e
    on e.deptno = d.deptno
 group by d.deptno, d.dname;
```



select * from deptsal;

Source: <https://github.com/PhilippSalvisberg/utplsql-red-stack-demo/blob/b-view-test/src/main/view/deptsal.sql>

7 MATERIALIZED VIEW

```
create materialized view deptsal refresh fast on commit as
  select deptno,
         dname,
         sum_sal,
         num_emps,
         round(avg_sal, 2) as avg_sal,
         'EMP' as row_source,      -- required for fast refresh after insert
         rowid as row_id          -- required for fast refresh after any DML
  from deptsal_emp_mv
union all
  select deptno,
         dname,
         0,
         0,
         0,
         'DEPT' as row_source,    -- required for fast refresh after insert
         rowid as row_id          -- required for fast refresh after any DML
  from deptsal_dept_mv
where emp_deptno is null;
```



update emp
set sal = sal + 100
where deptno = 10;


commit;

select * from deptsal;

Source: <https://github.com/PhilippSalvisberg/utpls-red-stack-demo/blob/c-mview-test/src/main/mview/deptsal.sql>

8 TRIGGER

```
create or replace trigger emp_as_iud
  after insert or update or delete on emp
begin
  etl.refresh_deptsal;
end;
/
```

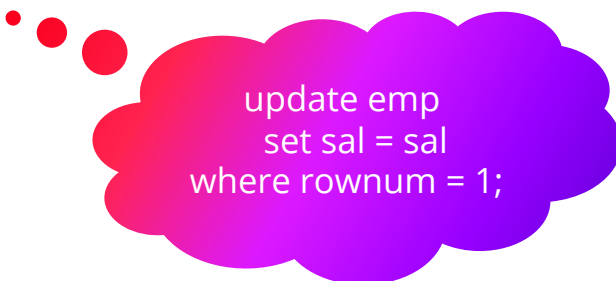

update emp
set sal = sal
where rownum = 1;

Source: https://github.com/PhilippSalvisberg/utplsql-red-stack-demo/blob/a-diy-test-5-trigger/src/main/trigger/emp_as_iud.sql

9 PACKAGE (PROCEDURE, FUNCTION, TYPE)

```
create or replace package etl is  
    procedure refresh_deptsal;  
end etl;  
/
```



exec etl.refresh_deptsal;

PL/SQL, C, Java, JavaScript, ...,
SQL, SQL/JSON Path, XPath,
XQuery, XSLT, ...

Source: <https://github.com/PhilippSalvisberg/utplsql-red-stack-demo/blob/a-diy-test-3-success/src/main/package/etl.pks>

10 TEST AUTOMATION

"The use of software
separate from the software being tested
to **control the execution of tests**
and the comparison of
actual outcomes with predicted outcomes."

Source: https://en.wikipedia.org/wiki/Test_automation

utPLSQL


Core Testing Framework

- Schema in the database
- No repository
- Annotation based tests




Development

- Realtime Reporter
- Code Coverage, Code Templates, etc.



Test Automation

- Command Line Client
- Maven Plugin
- Various Reporters



13 TEST DECLARATION

create or replace package test_suite as

--%suite

--%test

procedure test_case;
end test_suite;

--%displayname(<description>
--%test(<description>
--%tags(<tag>[,...]
--%throws(<exception>[,...])
--%beforeall
--%afterall
--%beforeeach
--%aftereach
--%beforetest([...])
--%aftertest([...])
--%rollback(manual)
--%disabled(<reason>)

--%suite(<description>
--%suitepath(<path>
--%tags(<tag>[,...]
--%displayame(<description>
--%beforeall([...])
--%afterall([...])
--%beforeeach([...])
--%aftereach([...])
--%rollback(manual)
--%disabled(<reason>)
--%context
--%endcontext

14 TEST IMPLEMENTATION

```
create or replace package body test_suite as
  procedure test_case is
    c_actual sys_refcursor;
    c_expected sys_refcursor;
  begin
    -- arrange
    insert into dept (deptno, dname, loc) values (-10, 'utPLSQL', 'Winterthur');
    -- act
    insert into emp (empno, ename, job, hiredate, sal, deptno)
    values (-1, 'Jacek', 'Developer', trunc(sysdate), 4700, -10);
    -- assert
    open c_actual for select deptno, dname, sum_sal from deptsal where deptno = -10;
    open c_expected for select -10 as deptno, 'utPLSQL' as dname, 4200 as sum_sal from dual;
    ut.expect(c_actual).to_equal(c_expected).join_by('DEPTNO');
  end test_case;
end test_suite;
```

Matcher:

be_between, be_empty, be_false, be_greater_than,
be_greater_or_equal, be_less_or_equal, be_less_than,
be_like, be_not_null, be_null, be_true, contain, **equal**,
have_count, match, be_within, be_within_pct, ...

Extended options for refcursor, object
type, JSON, nested table and varray:

- include(<items>)
- exclude(<items>)
- unordered
- **join_by(<items>)**

15 TEST RUN

```
set serveroutput on size unlimited
exec ut.run('test_suite')
```

List of ...
schema
[schema.]**package**[.procedure]
[schema]:suitepath[.context][.procedure]

Optionally extended by ...
, a_tags => 'includeTag, -excludeTag[, ...]'

```
test_suite
  test_case [.024 sec] (FAILED - 1)
```

Failures:

1) test_case

Actual: refcursor [count = 1] was **expected** to equal: refcursor [count = 1]

Diff:

Rows: [1 differences]

PK <DEPTNO>-10</DEPTNO> - **Actual:** <SUM_SAL>4700</SUM_SAL>

PK <DEPTNO>-10</DEPTNO> - **Expected:** <SUM_SAL>4200</SUM_SAL>

at "REDSTACK.TEST_SUITE.TEST_CASE", line 14 ut.expect(c_actual).to_equal(c_expected).join_by('DEPTNO');

Finished in .027162 seconds

1 tests, 1 failed, 0 errored, 0 disabled, 0 warning(s)


16 WHY utPLSQL?

- No repository (test suites are annotated PL/SQL packages)
- Independent of an IDE (but runs in any IDE)
- Integration into any CI environment via CLI or Maven plugin
- Test suites are PL/SQL packages (static SQL)
- Transaction control (auto, manual)
- Advanced Data Comparison (supporting any datatype in the database)
- Code Coverage (lines and code blocks)
- Easy to use

INSTALLATION

18 INSTALL UTPLSQL CORE TESTING FRAMEWORK

- Download utPLSQL.zip from <https://github.com/utPLSQL/utPLSQL/releases>
- Unzip utPLSQL.zip
- cd source
- sqlplus / as sysdba @install_headless.sql
 - User UT3
 - Password XNtxj8eEgA6X6b6f
 - Tablespace USERS

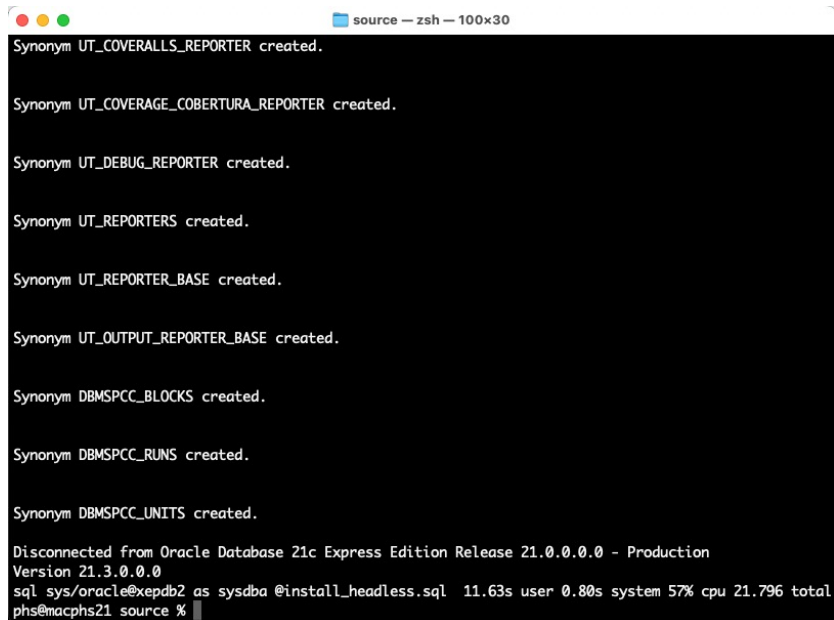

```
source — zsh — 100x30
Synonym UT_COVERALLS_REPORTER created.

Synonym UT_COVERAGE_COBERTURA_REPORTER created.

Synonym UT_DEBUG_REPORTER created.

Synonym UT_REPORTERS created.

Synonym UT_REPORTER_BASE created.

Synonym UT_OUTPUT_REPORTER_BASE created.

Synonym DBMSPCC_BLOCKS created.


Synonym DBMSPCC_RUNS created.

Synonym DBMSPCC_UNITS created.

Disconnected from Oracle Database 21c Express Edition Release 21.0.0.0.0 - Production
Version 21.3.0.0.0
sql sys/oracle@xepdb2 as sysdba @install_headless.sql 11.63s user 0.80s system 57% cpu 21.796 total
phs@macphs21 source %
```

19 INSTALL utPLSQL FOR SQL DEVELOPER FROM FILE *)


- Download utplsqli_for_SQLDev_*.zip from <https://github.com/utPLSQL/utPLSQL-SQLDeveloper/releases>
- Start SQL Developer
- Select "Check for Updates..." in the help menu *)
- Use the "Install From Local File" option to install the previously downloaded "utplsqli_for_SQLDev_*.zip" file
 - User must have read/write access to SQL Developer installation directory
 - Run as Administrator, if required
- Restart SQL Developer

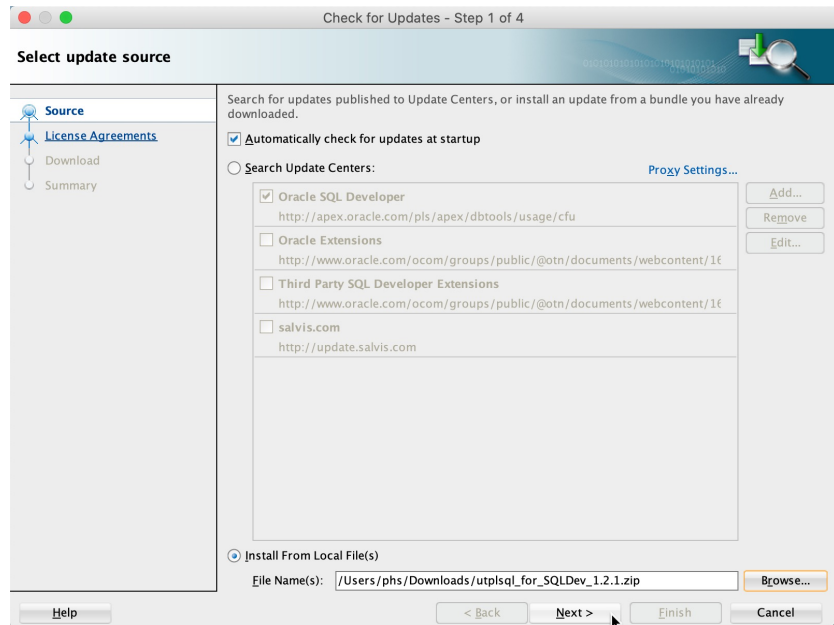

*) You can also configure an Update Center, see <https://github.com/PhilippSalvisberg/sqldev-update>

BUILD AND RUN TESTS

21 DEMO CASE STUDY

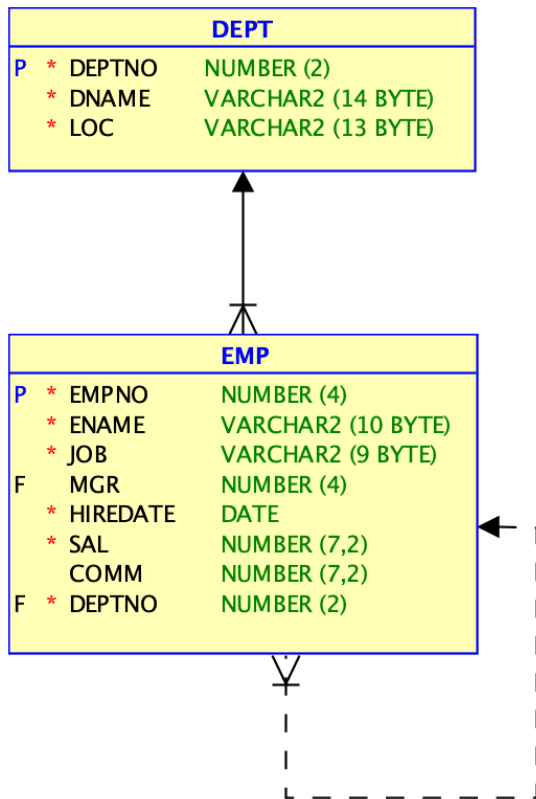


As a HR manager, I need a table with the key figures

- salary total,
 - number of employees and
 - average salary per department
- to assess fairness.

Source: <https://github.com/PhilippSalvisberg/utplsql-red-stack-demo>

22 REVIEW



Lisa
Team Member

Solution is more complex than necessary

Table deptsal is refreshed too often, e.g. on rollback or if more than one DML is used in a transaction

Providing a table is not mandatory, even if the HR manager has explicitly requested one

We could use a view instead

A materialized view is not yet required, data volume is small, a regular view should be fast

This would significantly reduce our code base and simplify maintenance

CODE COVERAGE

24 CODE COVERAGE – DEFINITION

"A measure used to describe the degree to which the source code of a program is executed when a particular test suite runs."

Source: https://en.wikipedia.org/wiki/Code_coverage

25 LINE COVERAGE

```
create or replace function f(a in integer) return integer is
begin
    if a is null then
        return 0;
    else
        return a * a;
    end if;
end f;
/
```



Two test cases for
100% coverage

26 CODE BLOCK COVERAGE (12.2 AND HIGHER)


```
create or replace function f(a in integer) return integer is
begin
    if a is null then return 0; else return a * a; end if;
end f;
/
```

Two test cases for
100% coverage

```
create or replace function f(a in integer) return integer is
begin
    return nvl(a * a, 0);
end f;
/
```

One test case for
100% coverage

27 utPLSQL – LINE & CODE BLOCK COVERAGE

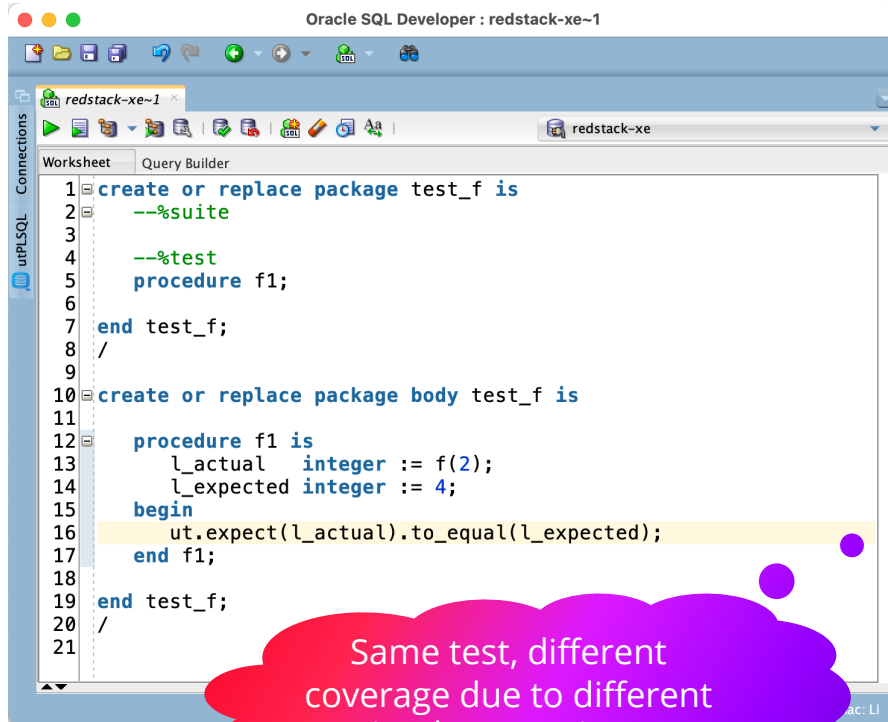


Oracle SQL Developer : redstack-xe~1

```
1 create or replace package test_f is
2   --%suite
3
4   --%test
5   procedure f1;
6
7 end test_f;
8 /
9
10 create or replace package body test_f is
11
12   procedure f1 is
13     l_actual integer := f(2);
14     l_expected integer := 4;
15   begin
16     ut.expect(l_actual).to_equal(l_expected);
17   end f1;
18
19 end test_f;
20 /
21
```

Same test, different coverage due to different implementations

1 of 2 code blocks covered

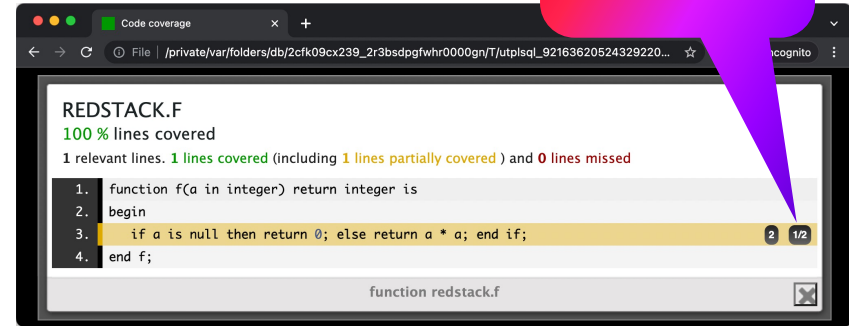


Code coverage

REDSTACK.F
100 % lines covered
1 relevant lines. 1 lines covered (including 1 lines partially covered) and 0 lines missed

Line	Code	Coverage
1.	function f(a in integer) return integer is	
2.	begin	
3.	if a is null then return 0; else return a * a; end if;	2 1/2
4.	end f;	

function redstack.f

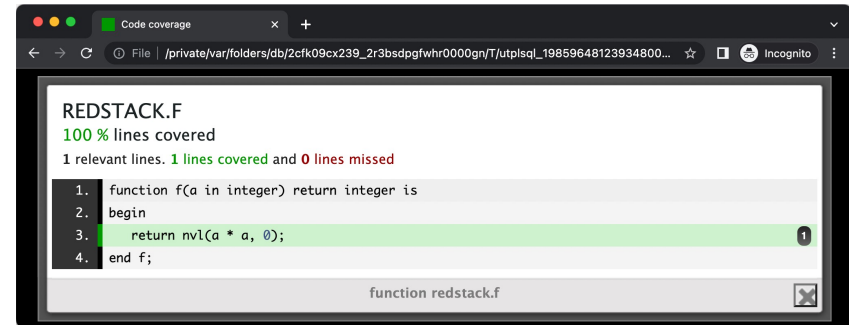

Code coverage

REDSTACK.F
100 % lines covered
1 relevant lines. 1 lines covered and 0 lines missed

Line	Code	Coverage
1.	function f(a in integer) return integer is	
2.	begin	
3.	return nvl(a * a, 0);	1
4.	end f;	

function redstack.f

CORE MESSAGES

29 PROGRAMMING WITH utPLSQL – THIS IS THE WAY

- Set up a test-friendly environment
 - Install utPLSQL core testing framework
 - Install SQL Developer for utPLSQL
- Start with tests
 - to reproduce bugs
 - for new requirements
- utPLSQL will change how you code
 - Write smaller units
 - Isolate code that is difficult to test



**TOGETHER WE ARE
#1 PARTNER FOR BUSINESSES TO
HARNESS THE POWER OF DATA
FOR A SMARTER LIFE**